


SLIFA API



1. Halaman Utama

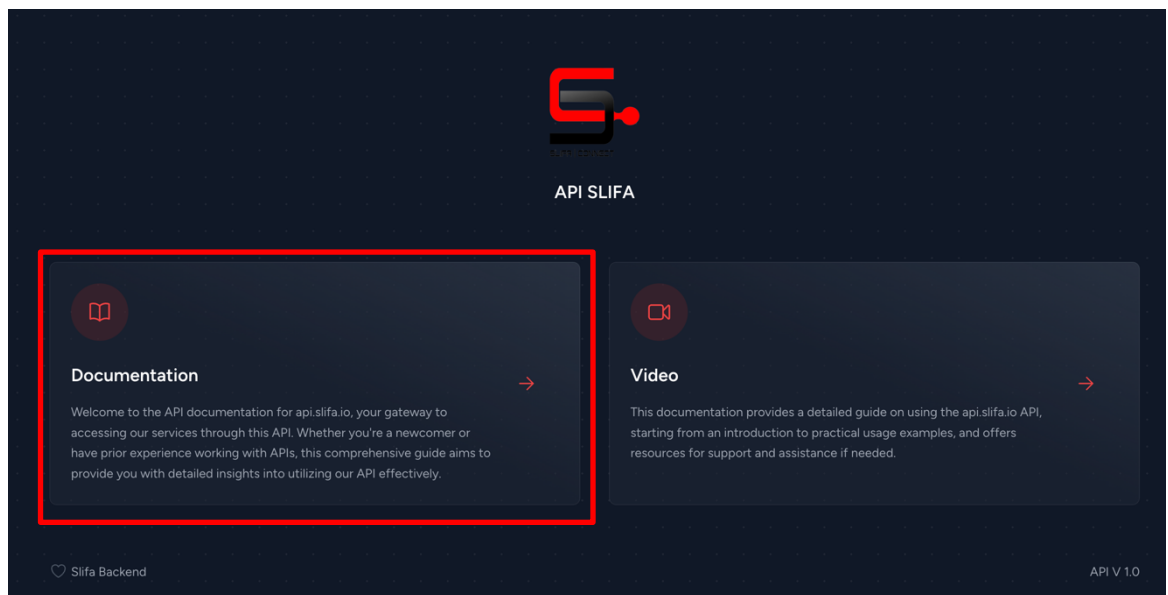

2. Login

The image shows the Swagger UI interface for the API SLIFA. At the top, there are three environment URLs: `http://127.0.0.1:8000/api` (localhost), `http://testapi.slifa.io/api` (Dev), and `http://api.slifa.io/api` (Prod). The `Prod` environment is selected. Below this, the Swagger logo and the API name `API SLIFA` are displayed, along with the version `1.0` and the OpenAPI specification version `OAS 3.0`. The `Explore` button is visible. The `Servers` dropdown is set to `http://127.0.0.1:8000/api`. The `Auth` section is expanded, and the `POST /auth/login` endpoint is highlighted with a red box.

Klik pada bagian post /auth/login

The image shows the detailed view of the `POST /auth/login` endpoint. The endpoint is described as "Api untuk login". The `Parameters` section lists two required query parameters: `username` (string) with a default value of `admin`, and `password` (string) with a default value of `*****`. The `Responses` section shows a single response with status code `200` and description `sukses`, with no links provided.

Name	Description
username • required string (query)	Username Login Default value : admin
password • required string (query)	password Default value : *****

Code	Description	Links
200	sukses	No links

- ### Try it out

- Authorize** 

- X**

Authorize

Close

Authorize

Close

3. Melihat daftar Device Slifa

The screenshot displays the Slifa API interface for the 'Device' endpoint. At the top, the 'Servers' dropdown is set to 'http://api.slifa.io/api - call ke environmen Prod'. The 'Device' section is highlighted with a red box, showing the GET method and the endpoint '/slifa/getdevice'. Below this, the 'Parameters' section is empty, and the 'Responses' section is expanded, showing a table of status codes and descriptions. A red box highlights the 'Execute' button. The 'Response body' section at the bottom shows the JSON response for a successful request (code 200).

Device

GET /slifa/getdevice

End Point untuk mendapatkan daftar device sesuai dengan otorisasi login

Parameters

No parameters

Responses

Code	Description	Links
200	sukses	No links
400	Bad request	No links
401	Invalid Token	No links
403	Token Tidak Ditemukan	No links
default	Menampilkan device sesuai dengan akses user	No links

Response body

```
{
  "code": 200,
  "data": [
    {
      "id_device": 5,
      "device_id": "9263",
      "police_no": "B 9962 EUW",
      "body_no": "HDA",
      "driver_1": "D-03",
      "driver_2": "D-03",
      "type_operation": "On Road",
      "speed_in_toll": null,
      "speed_in_road": null,
      "latitude": null,
      "longitude": null,
      "speed": null,
      "created_at": "2019-08-24T08:40:14.000000Z",
      "updated_at": "2019-08-24T08:40:14.000000Z",
      "company_id": 1,
      "device_code": "B 9962 EUW-HDA"
    }
  ]
}
```

